


# THE BRUCE<sup>®</sup> PM ANCHOR

(PATENTED)



## THE HIGH HOLDING POWER ANCHOR FOR PERMANENT MOORING REQUIREMENTS

- Superior holding performance in all seabeds.
- Placement anchor for all permanent mooring applications.
- Choice of fluke angles for optimum performance in hard and soft bottoms.
- Simplified fluke angle adjustment by moving two plain pins, no welding required.
- Disassembly into two parts for easier, lower cost shipping.
- Design can be tailored to suit customer requirements.
- Single point recovery lug on fluke minimises breakout resistance.
- Dimensions marked\* can be varied to suit required shackle sizes.

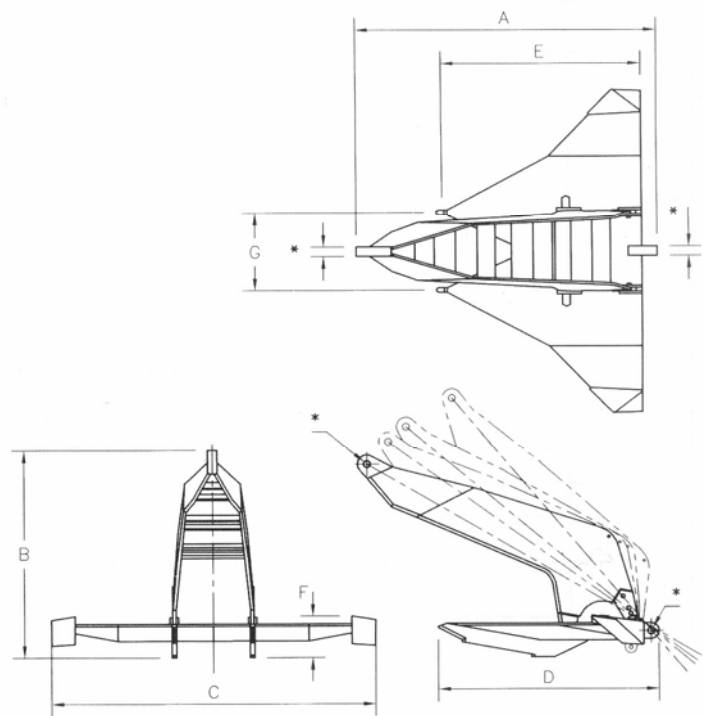

EXAMPLE SIZES	NOMINAL DIMENSIONS (in mm)						
Weight kg	A	B	C	D	E	F	G
5000	4288	2995	4659	3141	2768	594	1120
10000	5318	3715	5778	3895	3434	737	1389
15000	6012	4199	6531	4403	3881	833	1571
20000	6764	4725	7349	4954	4367	937	1767
30000	7742	5408	8412	5671	4999	1072	2023
40000	8437	5893	9166	6179	5447	1169	2204

# THE BRUCE<sup>®</sup> PM ANCHOR

